

Basic Information		
Place of Origin:	CHINA	
Brand Name:	JINSP	
Certification:	CE ISO9001	R.
Model Number:	RS2600PAT	Local Division
Minimum Order Quantity:	1	
Price:	Negotiable	
Packaging Details:	Customized Packaging	
Delivery Time:	90-120 working days	
Payment Terms:	тт	
Supply Ability:	20 PCS/90-120 days	

Product Specification

Laser Wavelength:	532nm
Spectral Range:	200 ~ 4200 Cm-1
Resolution:	≤ 8 Cm-1 At Full Spectral Range
Power Supply:	100 ~ 240 VAC 50 ~ 60 Hz
Analysis Time:	2 Seconds
 Measurement Uncertainty: 	≤0.2%
Lindelindet	Inductrial Multi Cas Analyzan

JINSP Company Ltd.

spectralanalyser.com

Highlight:

Industrial Multi-Gas Analyzer, 2s Analysis Time Multi-Gas Analyzer, Highly Accurate Multi-Gas Analyzer

RS2600PAT Online Raman Multi-Gas Analyzer

JINSP® RS2600PAT multi-gas analyzer is based on Raman spectroscopy and can detect all gases except noble gases, enabling simultaneous online analysis of multiple gases.

It is able to detect the following multiple gases with a detection range from ppm to 100%.

* Petrochemical industry: alkane, alkene and alkyne gases such as CH4, C2H6, C3H8, C2H4, etc.

- * Fluorine chemical industry: corrosive gases such as F2, BF3, PF5, Cl2, HCI, HF, etc.
- * Metallurgical industry: N2, H2, O2, CO2, CO, etc.

Multi-Gas Analyzer RS2600PAT



Technical Highlights:

- Multi-component: simultaneous online analysis of multiple gases
- Universal: >500 types of gases are detectable except noble gases
- No need for pressure control: Quantification is not affected by changes in sample gas pressure
- Rapid response: Complete a single detection within seconds
- Wide quantitative range: detection limit is as low as ppm level, and the measurement range can be as high as 100%

Technical Highlights

Non-Destructive Gas Analysis

>500 types of gases are detectable, including diatomic gases (F_2 , Cl_2 , etc.) and isotopic gases (H_2 , D_2 , T_2 , etc.)

Short Detection Time

Complete a single detection within seconds

Low Maintenance

Withstands high pressure, direct detection with no consumables (Chromatographic column, Carrier gas)

Wide Quantitative Range

detection limit is as low as ppm level, and the measurement range can be as high as 100%

Specifications:

ser excitation wavelength 532 ± 0.5 nm Spectral coverage 200 ~ 4200 cm-1 Spectral resolution ≤8 cm-1 at full spectral range Air circuit interface 6 mm standard tube fitting (3 mm, 1/8", and 1/4" are optional) Explosion-proof ExdbebibmbpxbllCT4Gb / ExtbibmblllCT135°CDb Input voltage 100~240 VAC,50~60 Hz		
easurement uncertainty ≤0.2% ser excitation wavelength 532 ± 0.5 nm Spectral coverage 200 ~ 4200 cm-1 Spectral resolution ≤8 cm-1 at full spectral range Air circuit interface 6 mm standard tube fitting (3 mm, 1/8", and 1/4" are optional) Explosion-proof ExdbebibmbpxbllCT4Gb / ExtbibmblIICT135°CDb Input voltage 100~240 VAC,50~60 Hz	Components	N2, H2, O2, CO, CO2, H2S, CmHn, etc.
Spectral coverage 532 ± 0.5 nm Spectral coverage 200 ~ 4200 cm-1 Spectral resolution ≤8 cm-1 at full spectral range Air circuit interface 6 mm standard tube fitting (3 mm, 1/8", and 1/4" are optional) Explosion-proof ExdbebibmbpxbllCT4Gb / ExtbibmblllCT135°CDb Input voltage 100~240 VAC,50~60 Hz	Analysis time	2 seconds
Spectral coverage 200 ~ 4200 cm-1 Spectral resolution ≤8 cm-1 at full spectral range Air circuit interface 6 mm standard tube fitting (3 mm, 1/8", and 1/4" are optional) Explosion-proof ExdbebibmbpxbllCT4Gb / ExtbibmbllICT135°CDb Input voltage 100~240 VAC,50~60 Hz	Measurement uncertainty	≤0.2%
Spectral resolution ≤8 cm-1 at full spectral range Air circuit interface 6 mm standard tube fitting (3 mm, 1/8", and 1/4" are optional) Explosion-proof ExdbebibmbpxblICT4Gb / ExtbibmblIICT135°CDb Input voltage 100~240 VAC,50~60 Hz	Laser excitation wavelength	532 ± 0.5 nm
Air circuit interface 6 mm standard tube fitting (3 mm, 1/8", and 1/4" are optional) Explosion-proof ExdbebibmbpxbllCT4Gb / ExtbibmblllCT135°CDb Input voltage 100~240 VAC,50~60 Hz	Spectral coverage	200 ~ 4200 cm-1
Explosion-proof ExdbebibmbpxbllCT4Gb / ExtbibmbllICT135°CDb Input voltage 100~240 VAC,50~60 Hz	Spectral resolution	≤8 cm-1 at full spectral range
Input voltage 100~240 VAC,50~60 Hz	Air circuit interface	6 mm standard tube fitting (3 mm, 1/8", and 1/4" are optional)
	Explosion-proof	ExdbebibmbpxbIICT4Gb / ExtbibmbIIICT135ºCDb
	Input voltage	100~240 VAC,50~60 Hz
-50 ~ 40 -C	Sample gas temperature	-50 ~ 40 °C
Sample gas pressure 1.0 MPa	Sample gas pressure	1.0 MPa
Unit dimensions 485 mm (Width) × 350 mm (Height) × 600 mm (Depth)	Unit dimensions	485 mm (Width) × 350 mm (Height) × 600 mm (Depth)
Weight 40 kg	Weight	40 kg

Field of Applications:

Petrochemical field; Fluorine chemical industry; Metallurgical field; Isotope gases.

Field of Application



Natural gas industry



Fluorine chemical industry



Metallurgical industry



Electronic special gas



Coal chemical industry



Pharmaceutical chemical industry


Features:

Quantitative model of multiple standard curves, combined with the chemometric method, establishes the relationship between the spectral signal (peak intensity or peak area) and the content of multi-component substances. Changes in sample gas pressure and test conditions do not affect the accuracy of quantitative results. No need to establish a separate quantitative model for each component.


Typical Spectra

Gas Mixture Analysis

Component	Concentration (ppm)
CH₄	50
C ₂ H ₆	30
C₃H ₈	40
C ₂ H ₄	15
C_3H_6	20

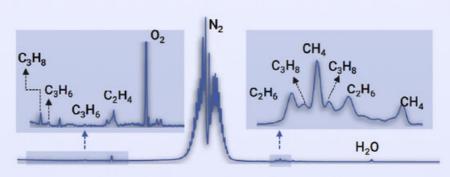

Standard Gas Spectra

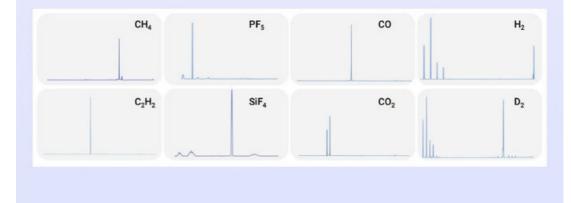

JINSP Company Limited has won the National Science and Technology Commission's Scientific and Technological Achievement Appraisal Certificate and the China Patent Excellence Award, and related products have been obtained has won authoritative awards such as the Geneva International Invention Award, the Beijing New Technology and New Product Certificate, and the "Innovation Achievement Award" of the Zhu Liangyi Analytical Instrument Innovation Award.In addition, JINSP participated in the drafting of several national and international standards, including participating in the drafting of an international standard as the only participating unit in China IEC 63085 International Standard: System of spectral identification of liquids in transparent or semitransparent containers; Drafting of two national standards: GB/T 41086-2021 "General Technical Requirements for Safety Inspection Equipment for Hazardous Chemicals Based on Raman Spectroscopy", GB/T 40219-2021 "General Specification for Raman Spectrometer".

Company Profile



Exhibition











Certifications



Q1: This is the first time I use it, is it easy to operate?

A1:We will send you a manual and guide video in English, it can teach you how to operate the spectrometer. Also, our technicians will offer professional technical operation meetings.

Q2: Can you offer an operation training?

A2: Your technicians can come to our factory for training. Jinsp engineers can go to your place for local support (installation, training, debugging, maintenance).

Q3: How to receive the best price in the shortest time?

A3: When you send us an inquiry, please kindly offer details with wavelength, detector, effective pixels, focal length, and so on. We will send you a quotation with details soon to your email.

Q4: What about quality assurance?

A5:We have a quality inspection team. All goods will go through quality inspection before shipment. We can send you pictures for inspection.

JINSP JINSP Company Ltd.				
	S 8618620854039 Sphoebeyu@jinsptech.com Spectralanalyser.com			
21st Flo	or, Building D, Tsinghua Tongfang Science and Technology Plaza, Haidian District, Beijing China			