

## JINSP SR100N17 and SR100N25 Near-Infrared Spectrometers for Versatile Applications in Non-Destructive Detection of Fruits

Our Product Introduction

for more products please visit us on [spectralanalyser.com](http://spectralanalyser.com)

### Basic Information

- Place of Origin: CHINA
- Brand Name: JINSP
- Certification: ISO9001
- Model Number: SR100N17 SR100N25
- Minimum Order Quantity: 1
- Price: Negotiable
- Packaging Details: International Shipping Package
- Delivery Time: 30-40 working days
- Payment Terms: T/T, Western Union
- Supply Ability: 200PCS/30-40 working days



### Product Specification

- Measurement Range: 900nm~2500nm
- Wavelength Repeatability:  $\pm 0.05$  Nm
- Type: Refrigerated Linear Array InGaAs
- Sensing Area: 12.8mm\*0.5mm
- Entrance Slit Width: 5 $\mu$ m, 10 $\mu$ m, 25 $\mu$ m, 50 $\mu$ m (customizable)
- Incident Light Interface: SMA905 Fiber Interface, Free Space



### More Images



## Product Description

### Measurement of Sugar and Moisture in Fruits by Near-Infrared Spectrometers

This advanced optical technique, NIR spectroscopy, allows non-destructive fruit testing. By scanning NIR wavelengths, it identifies compositional traits (e.g., sugars, acids) swiftly, ensuring accurate quality classification and optimized storage protocols.

Engineered for precision, the SR100N17/SR100N25 spectrometers operate in NIR ranges (0.9–2.5 $\mu$ m). Their integrated filtration system removes stray light, and the temperature-controlled 512-pixel sensor enhances accuracy in transmission, reflection, and absorption-based assays.

#### Technical Specifications:

	Performance Indicators	SR100N17	SR100N25
Detector	Type	Refrigerated linear array InGaAs	
	Effective Pixel	512	
	Pixel Size	25 $\mu$ m*500 $\mu$ m	
	Sensing Area	12.8mm*0.5mm	
Optical Parameters	Wavelength Range	900-1700nm	900-2500nm
	Optical Resolution	3.1nm(@25 $\mu$ m)	6.3nm(@25 $\mu$ m)
	Optical Design	F/4 cross-type	
	Numerical Aperture	0.14	
	Focal Length	100mm	
	Entrance Slit Width	5 $\mu$ m ,10 $\mu$ m ,25 $\mu$ m ,50 $\mu$ m (customizable)	
	Incident Light Interface	SMA905 fiber interface, free space	
Electrical Parameters	Integration Time	1ms-12s	1ms-200ms
	Data Output Interface	USB2.0, UART	
	ADC Bit Depth	16-bit	
	Power Supply	DC4.9 to 5.1V(type @5V)	
	Operating Current	3A	
	Operating Temperature	10°C~40°C	
	Storage Temperature	-20°C~60°C	
	Operating Humidity	90%RH (no condensation)	
Physical Parameters	Dimensions	178mm*123mm*49mm	
	Weight	1.2kg	

#### Measurement Principle:

In the 780-2500nm NIR range, absorbed light excites molecular vibrations that generate diagnostic spectra. Agricultural products display broad peaks from combination vibrations of functional groups, enabling NIR to identify chemical features and multiple components for quality evaluation.

#### Measurement Method:

Near-infrared reflection detection method: It is suitable for detecting information on the surface of fruit peels, such as color and luster, but not for internal quality detection.

Near-infrared transmission detection method: Theoretically, it is applicable to transparent or semi-transparent samples and cannot penetrate fruits. It is less used in practical applications.

Near-infrared diffuse reflection detection method: It is a measurement method between reflection and transmission, suitable for opaque, solid and semi-solid samples. The obtained spectral information can reflect the characteristics of the internal structure of fruits and is widely used in the detection of internal qualities of fruits (such as sugar content, acidity, etc.).

#### Applications:

**Quality assessment:** Predict quality parameters such as firmness, sweetness, and acidity of fruits.


**Classification and identification:** Distinguish and identify the types of different fruits.

**Functional fruit evaluation and screening:** It can be used to evaluate and screen functional fruits rich in special components.

**Disease monitoring:** It can quickly diagnose diseases such as citrus Huanglongbing and provide early warnings for disease prevention and control.



## Spectrometer Series

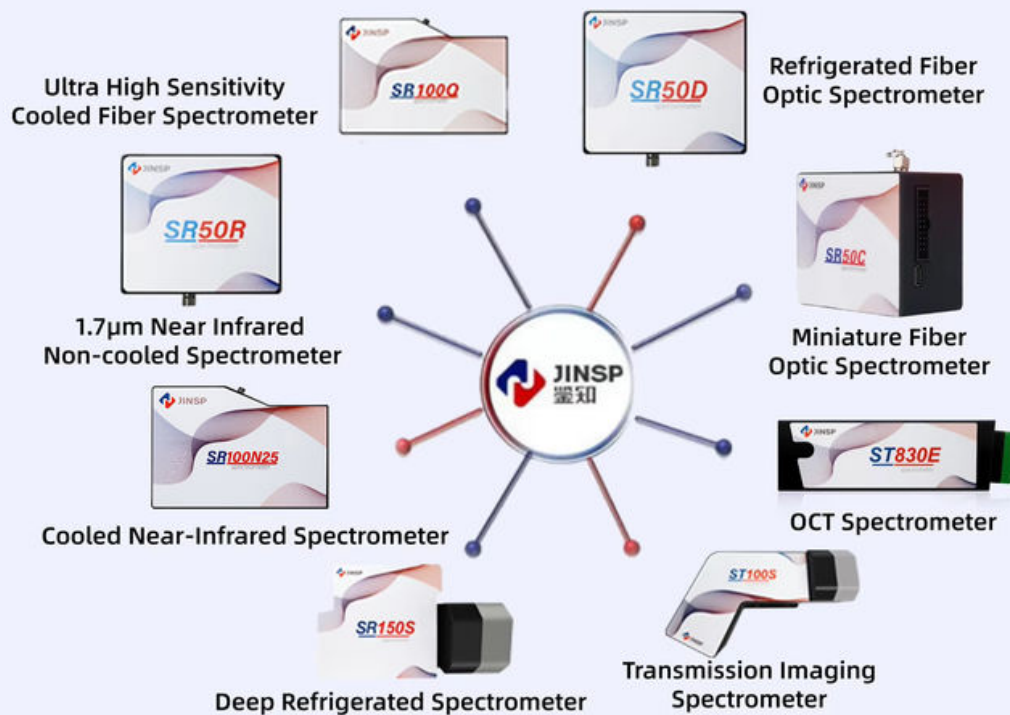

### Company Profile and Exhibition:

JINSP Company Limited originates from Tsinghua University and has 17 years of experience in developing spectroscopic technology. As a leading supplier of spectroscopic technology, JINSP Technology offers over twenty spectroscopic products across various fields, including pharmaceutical and chemical industries, public security, customs, and fiber optic spectrometers. Our products are available nationwide and are exported to over 30 countries, with cumulative sales exceeding 3,000 units.

### Our products mostly include:

- UV VIS NIR fiber optic spectrometers;
- Desktop/portable, online Raman analyzers for laboratory or industrial liquid & gas analysis;
- On-site rapid detectors/identifiers based on Raman technology for drugs, liquid, food safety, explosive & hazardous materials, pharmaceutical industry etc;

# Company Profile





# Exhibition



# Certifications



## FAQ

Q: This is the first time I use, is it easy to operate?

A: We will send you manual and guide video in English, it can teach you how to operate the spectrometer. Also our technicians will offer professional technical operation meetings.

**Q: Can you offer an operation training?**

A: Your technicians can come to our factory for a training. Jinsp engineers can go to your place for local support (installation, training, debugging, maintenance).

**Q: What's your website?**

A: You can visit: [www.jinsptech.com](http://www.jinsptech.com)

**Q: What about your quality assurance?**

A: We have a quality inspection team. All goods will go through quality inspection before shipment. We can send you pictures for inspection.



JINSP

JINSP Company Ltd.



8618620854039



[phoebeyu@jinsptech.com](mailto:phoebeyu@jinsptech.com)



[spectralanalyser.com](http://spectralanalyser.com)

21st Floor, Building D, Tsinghua Tongfang Science and Technology Plaza, Haidian District, Beijing China